





Hansa
by styro

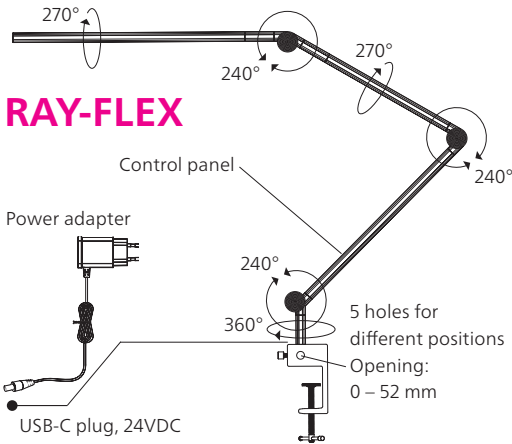

RAY-FLEX

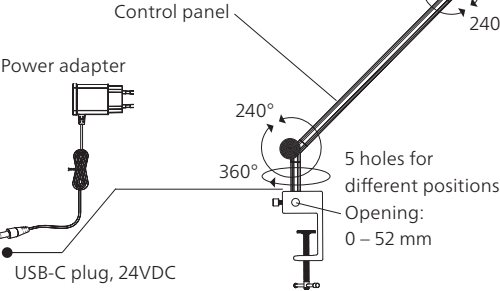

Operation



4 successive lighting modes:

Relax (3000 K), Read (4000 K),
Work (5500 K), Night (3000 K)



Dimmer: Long touch for stepless
color temperature change




Dimmer: 5 brightness levels



Short touch to turn on/off the lamp

Long touch : one time for delayed turn
off after 15 min, two times for turn off
after 45 min.

Memory function: previous colour temp. and
dimming level are recalled at following turn on



styro ag


Frauholzstr. 27, CH-6422 Steinen
Tel. +41 (0)41 833 80 10
info@styro.ch | www.styro.ch

EU Distributor | styro GmbH

Industriestr. 2, D-91583 Schillingsfürst
Tel. +49 9868 98949-0
verkauf@styro.de | www.styro.de
produkte@styro.de



Installation

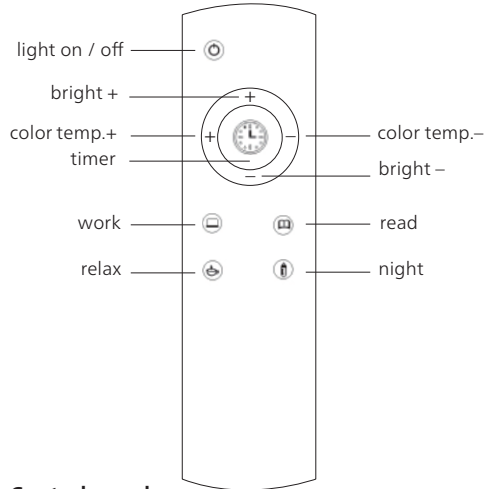

Control panel



SP20250904



Technical data

Voltage:	AC 220-240V, 50-60Hz
Lighting power:	12 W
Luminous flux:	600 lm
Colour temp.:	3000 – 5500 K
Protection class:	II (w/o adapter III)
Ingress protection:	IP20
Battery :	1x CR2432 (not incl.)
Model number:	41-5011.008

This product contains a light source of
energy efficiency class F

The construction of the luminaire does not
allow the lighting source to be replaced,
as there is a risk of damaging the luminaire.
The operating device is in the adapter.